

Specification

Customer name: powermeter

Product name: Split core current transformer


Manufacturer model: SCT010

Customer No.: _____



Characteristics:

1. Installation method: Sub-plate mounting
2. Material of core: Ferrite
3. Operating temperature: $-25^{\circ}\text{C} \sim +60^{\circ}\text{C}$
4. Storage temperature: $-30^{\circ}\text{C} \sim +90^{\circ}\text{C}$
5. Dielectric strength: 3500V AC/min 5mA(secondary/shell)


Outline size: (in:mm)

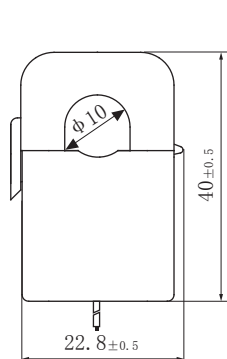

Front view



Side view



Connection diagram

Basic technical parameter table:

Input current	Output current	Accuracy	Work frequency	Weight
80A AC	1.35V AC	1%	50Hz-60Hz	45g

Noted: 1 mTwo core shielded wire ,5.5DC plug.voltage output type not allowed secondary short circuit.

The above parameters are all typical values, and the actual value is subject to the actual measurement of the product.

When user confirmed the parameters please sign it, the specification will be executed as an appendix of contract

Customer sign:

"Qinhuangdao Dechang Electric Co.,Ltd

Contact person: Skiana Liu

Email: yhdc@yhdc.com

Tel: +86 335 7129734

Web: en.yhdc.com "

Approved by:

Checked by:

曹军

