

Specification

Customer name: powermeter

Product name: Split core current transformer

Manufacturer model: SCT016S


Customer No.: _____

Characteristics:



1. Installation method: suspended
2. Material of core: Silicon steel sheet
3. Operating temperature: -25℃ ~ +60℃
4. Storage temperature: -30℃ ~ +90℃
5. Dielectric strength: 3500V AC/min 5mA(secondary/shell)




Outline size: (in:mm)

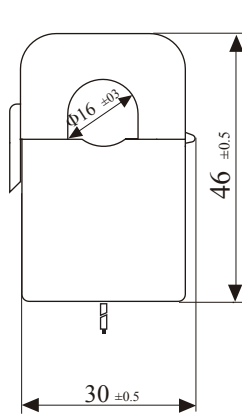

Front view

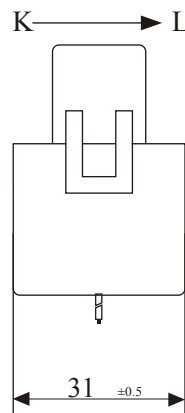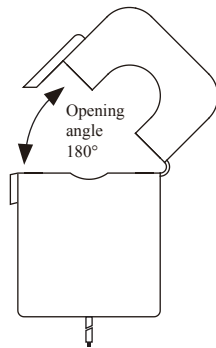

side view

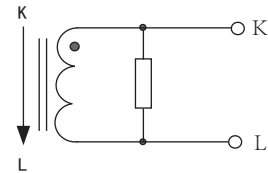

Connection diagram

Basic technical parameter table:

Input current	output voltage	Auccuracy	Work frequency	weight
150A AC	1.35V AC	1%	50Hz-1kHz	70g

Note: 1 m two core shielded wire ,5.5DC plug.voltage output type not allowed secondary short circuit.

The above parameters are typical values, and the actual . values are based on the measured products.

Please sign if the user confirms correctly. This specification will be executed as an appendix to the contract.

Customer sign:

"Qinhuangdao Dechang Electric Co.,Ltd

Contact person: Skiana Liu

Email: yhdc@yhdc.com

Tel: +86 335 7129734

Web: en.yhdc.com "

Approved by:

Checked by:

曹峰

