

Specification

Customer name: powermeter

Product name: Split core current transformer

Manufacturer model: SCT4333QL-B2

Customer No.: _____


Characteristics:

1. Installation method: suspended
2. Material of core: Silicon steel sheet
3. Operating temperature: $-25^{\circ}\text{C} \sim +60^{\circ}\text{C}$
4. Storage temperature: $-30^{\circ}\text{C} \sim +90^{\circ}\text{C}$
5. Dielectric strength: 3500V AC/min 5mA(secondary/shell)


Dimension: (in:mm)




Iron core way of opening and closing: rotation card button



Front view

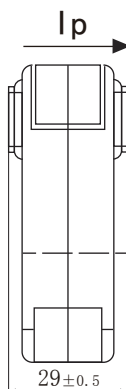

Side view



Connection diagram

Basic technical parameter table:

Input current	Output voltage	Accuracy	Work frequency	Weight
600A AC	1.35V AC	1%	50Hz-60Hz	404g

Noted: 1 m two core shielded wire ,5.5DC plug.The outgoing position is subject to the real object.

voltage output type not allowed secondary short circuit.

The above parameters are all typical values, and the actual value is subject to the actual measurement of the product.

When user confirmed the parameters please sign it, the specification will be executed as an appendix of contract

Customer sign:

"Qinhuangdao Dechang Electric Co.,Ltd

Contact person: Skiana Liu

Email: yhdc@yhdc.com

Tel: +86 335 7129734

Web: en.yhdc.com "

Approved by: _____

Checked by: _____

曹军

